


Slim Metal Magnetic Power Bank Instruction Manual
7894

Please read the following carefully before using this device to ensure safe and proper usage.

Package Content:

- 1x Power bank
- 1x USB-C to USB-C cable

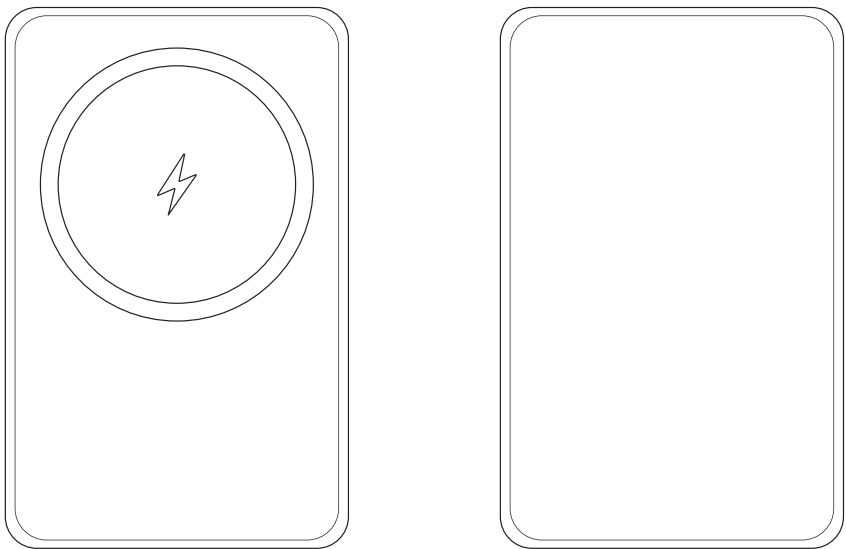

Specifications:

- Capacity: 5000mAh/3.85V
- Input(USB-C): 5V/3A, 9V/2A, 12V/1.5A
- Output: total 20W
- Output(USB-C): 5V/3A, 9V/2.22A, 12V/1.67A
- Wireless: 5W/7.5W/10W/15W Max snap and charge
- USB-C+ Wireless: 5V/3A
- Four white and one blue LED light indicators

Charging your device using your power bank:

IMPORTANT : Before using your power bank for the first time, fully charge it (when powered on, all 4 status LEDs are illuminated).

Connect the supplied USB-C cable (or the cable that came with your device) to the power bank’s USB port and to your device. Then begin charging.

During charging of your device, the four indicators will shut off one by one as your device receives power, when the power bank is low in power, the first LED indicator bar will flash and go out automatically until all the power is used up.

Checking your power bank battery’s charging status

Momentarily press the button on your power bank and the status LEDs will indicate its charge level. Four LEDs means that the power bank battery is fully charged, while one LED means that it’s almost empty. Know before you go!

- | | |
|--------|--------|
| 1 LED | < 25% |
| 2 LEDs | < 50% |
| 3 LEDs | < 75% |
| 4 LEDs | < 100% |

If you see no LEDS or 1 flashing LED, the battery status is less than 10%. Please recharge the power bank.

Recharging your power bank:

To recharge your power bank, use the supplied USB cable to connect its USB-C port to a USB wall charging adapter. While recharging the power bank, all LEDs are ON. If there is one white LED flashing, the charging is not completed. Once the power bank is fully charged, all LEDs are illuminated.

NOTE: For best results, do not connect the power bank to a computer’s USB port. We recommend using a wall charging adapter that supports fast charging protocols such as QC or PD.

Wireless charging:

Snap or place your smartphone that supports wireless charging on the charger surface, the blue LED indicator will light up once the unit enters wireless charging mode.

To stop the wireless charging function, press the button twice quickly or simply remove the smartphone.

This wireless charger can charge smartphones with non-metal protective case or silicone covers that are no thicker than 6mm.

Security advice:

Attention

- Incorrect usage can cause explosions / danger of chemical burns.
- Damaged batteries can cause chemical burns when they come in contact with human skin.
- Do not disassemble the item
- Never throw the item or parts of it into fire
- Never expose the item to high temperature changes Hot/Cold, humidity or liquids
- Do not use if the items or parts of it are damaged
- Store in a clean and dry space
- To maintain battery good health, the item should be recharged every 6 months. Battery will lose capacity when stored without charging.
- If the product gets very hot, please disconnect the item and do not use it.
- Do not put any bare metal objects on the surface of wireless charger when it is operating.